

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 15 TOWNSHIP 15 RANGE 3
DATE: 6-18-01 6-28-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-18-96



IN. S.P.C. E ZONE, NAD 83

NAME: 15031505

N: 499217.4900(m)

E: 55392.0386(m)

Entrance to Lilly Tech.Ctr

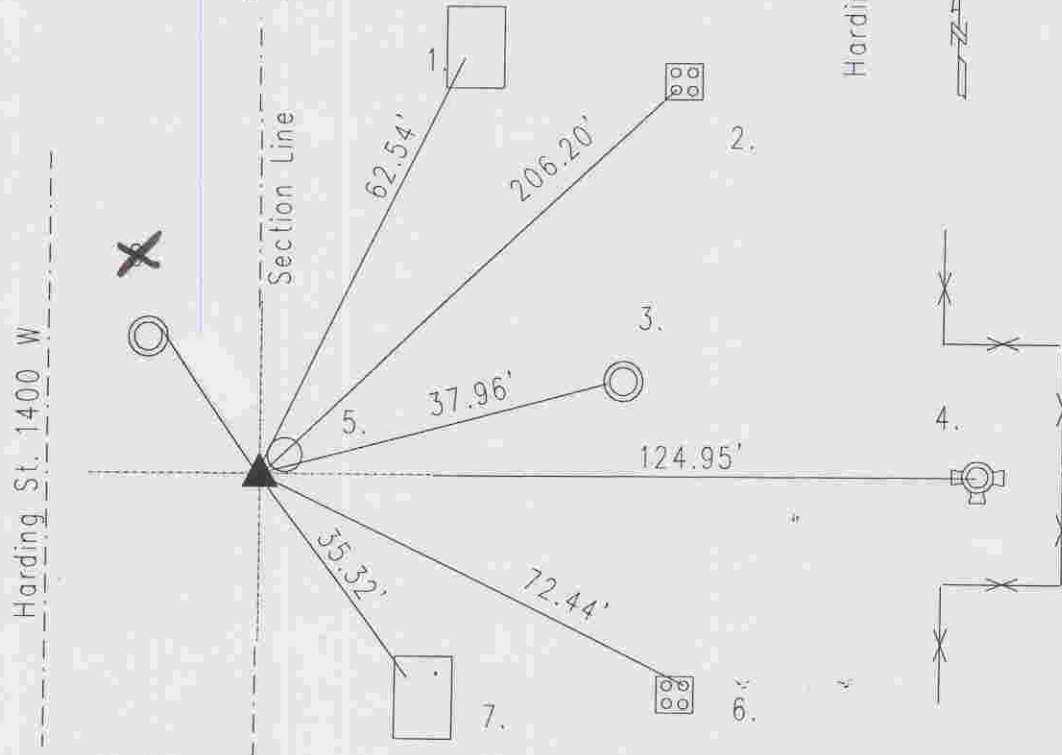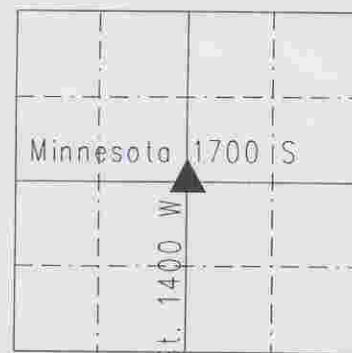

No stone nor witnesses were mentioned in Center Township Legal Survey Book A bolt was set by McLand at an unknown date. Corner was referenced by Cripe Engineering, 8-30-73 and called a bolt, Miller 7-30-75 called a PK nail, 11-24-86 MCSO called corner a PK nail. Excavated 12-14-95 by Kiste and Harrison was set in accordance with Harding Street construction project. Re-tied 7-18-96 by Kiste. Re-tied 6-18-01 by Wilcoxon.

15031505

REF.	DISTANCE	DESCRIPTION
1.	62.54'	Cut 'x' SW storm inlet
2.	206.20'	Cut 'x' SW-bolt of signal base
3.	37.96'	Cut 'x' W rim manhole -
4.	124.95'	Due E to top nut of fire hydrant
5.	2' +/-	Due E to curb
6.	72.44'	Cut 'x' NE-bolt of signal base
7.	35.32'	Cut 'x' NW storm inlet
8.	10.82'	Cut 'x' NE rim manhole

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.